

Figure 6.3 1/3, 2/3 control of a steam-to-hot water heat exchanger, performed by an electronic temperature controller.

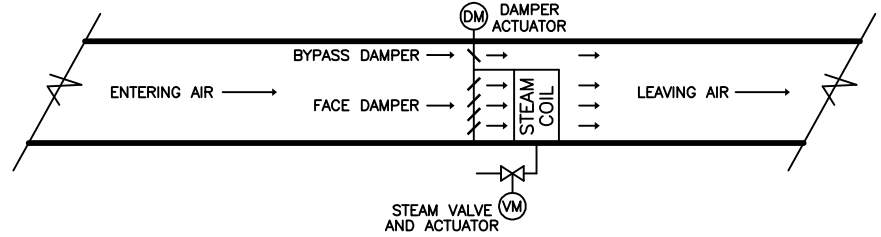


Figure 6.4 Steam coil equipped with a face/bypass damper assembly.

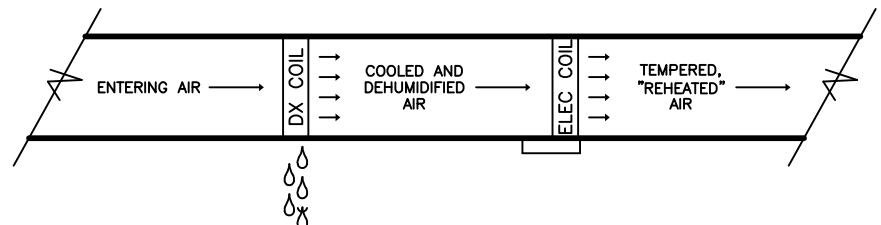


Figure 6.5 Direct expansion and electric heating coils employed in a dehumidification cycle.